




Guided Bend Fixture – 10kN

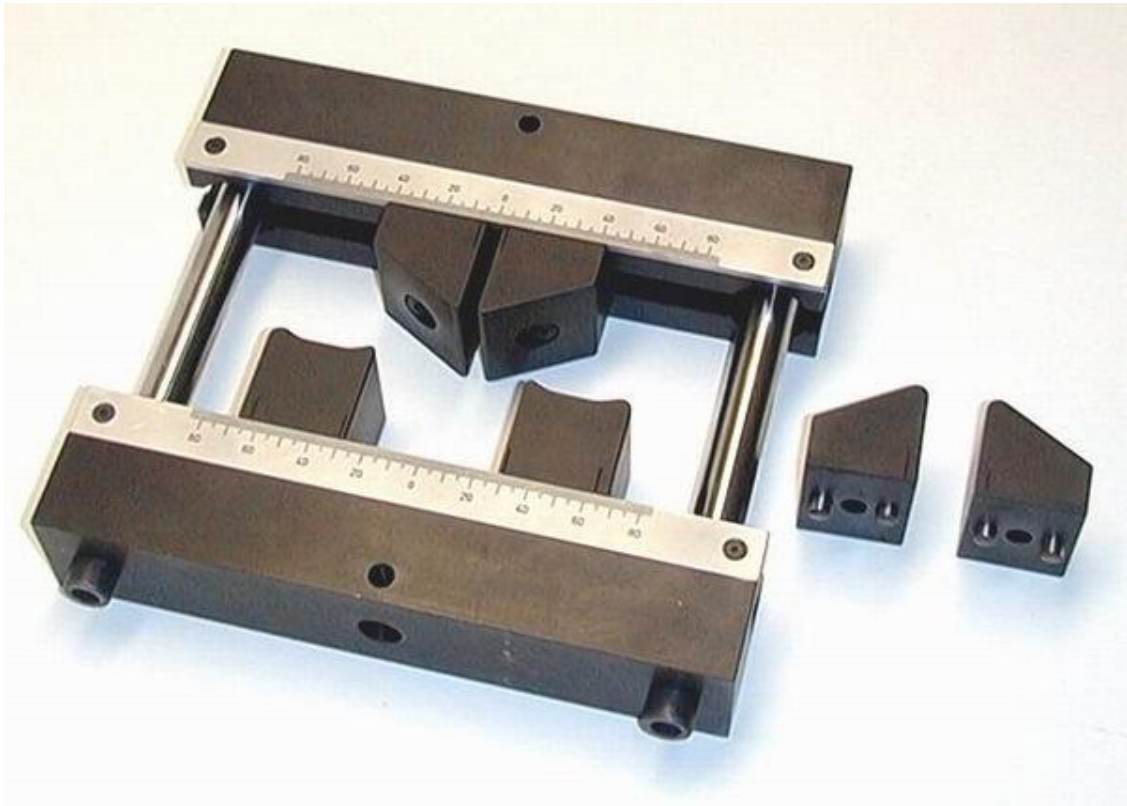

Sample Length: 4-150mm

Sample Width: 0-30mm

Radii: 1, 2, 3, 4, 5, 6, 6.35, 8, 10, 12, and 12.7mm

Contact Points – Pick Interchangable Rollers or Fixed Radius

3 point or 4 point loading nose (Pick 1 radii)

Reversible Bottom Spans (Pick 2 radii)

5/8" female coupling with 5/16" locking pin

Schematic (mm)

