Page 1 of 2 32-1062 REV 1020


The compact ES05 test stand is designed for compression testing of up to 30 lbF (150 N). Typical applications include switch contact activation testing, small spring testing, peel testing, and more. A spring-loaded lever allows for repeatable testing with up to 1.5" (38 mm) displacement. The lever mechanism can be repositioned along the length of the column, allowing this stand to be used for various sized samples.

The ES05's small footprint makes it particularly well suited to crowded workbenches, while its low weight makes it very portable for field auditing or for quick transportation to other testing areas.

Specifications

| Load capacity: | 30 lbF [150 N] |
|-----------------|--|
| Loading method: | Spring-loaded lever |
| Maximum travel: | 1.5 in [38 mm] |
| Warranty: | 3 years (see individual statement for details) |

Optional Equipment



Base plate AC1060

Contains 25 #10-32 threaded holes for fixture

In The Box

The ES05 test stand is shipped as shown at left, and includes the following accessories:

- (1) Allen wrench set
- (4) Thumb screw for force gauge







The ES05 is shown in a spring compresssion test, with Series 5 digital force gauge and 2" compression plate

32-1062 REV 1020 Page 2 of 2

Dimensions

in [mm]

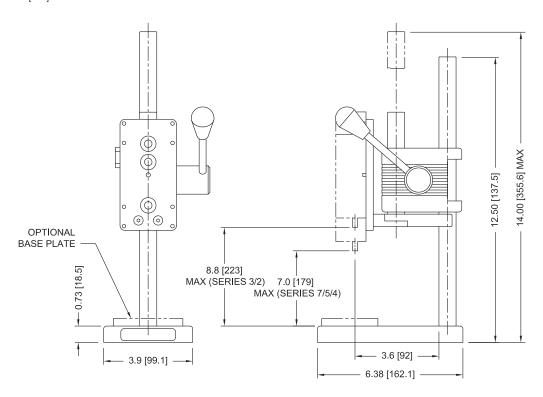



Ordering Information

| Model No. | Description |
|-----------|------------------------------------|
| ES05 | Test stand, lever-operated, 30 lbF |
| AC1060 | Base plate, threaded holes |