


## HYDRAULIC GRIP

Clamping force:	180 kN at 315 bar
3 rods 50 mm Ø with spring return	
Max rod movement:	15 mm
Coupling:	Af318, Af40, Af60 Further couplings on request
Hydraulic connection:	¼"
Material:	Steel, nickel-plated
Temperature range:	0 °C ... +70°C Further temperature ranges on request
Weight:	~55 kg per grip without jaws
Scope of delivery:	1 pair of grips



**Blank jaws**  
 - Blank, no coating  
 - Suitable for own further treatment  
 - Nickel-plated

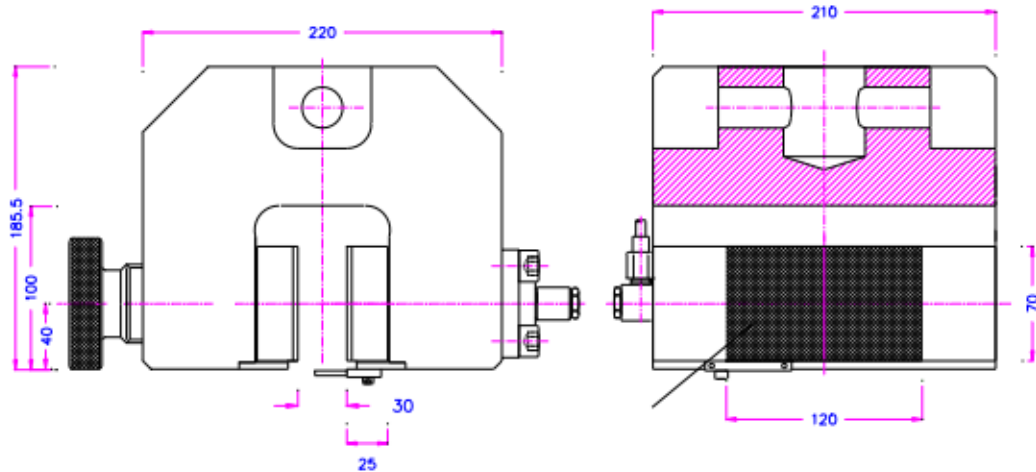

**Pyramid (serrated) jaws**  
 - Pyramids 1.2x45°  
 - Steel hardened 58 HRC  
 - Nickel-plated



**V-jaws**  
 - For round samples  
 - Tooth pitch 1.2 mm  
 - Steel hardened 58 HRC  
 - Nickel-plated



**Wave jaws**  
 - Wave distance 5 mm  
 - Steel hardened 58 HRC  
 - Nickel-plated

Surface	Clamping surface H x W	Opening	Weight per pair
Blank jaws	70 x 210 mm	0 - 30 mm	6.6 kg
Pyramid (serrated) jaws	70 x 120 mm	0 - 30 mm	6.6 kg
Pyramid (serrated) jaws	70 x 210 mm	0 - 30 mm	5.4 kg
V-jaws	Clamping height 70 mm	8 - 30 mm Ø	6.6 kg
Wave jaws	70 x 210 mm	0 - 30 mm	6.6 kg
Rubber-coated wave jaws	70 x 210 mm	0 - 26 mm	6.7 kg